

INFOTAINMENT SYSTEM- CORRIDOR STATUS LIGHT (ODL-34/35/36)

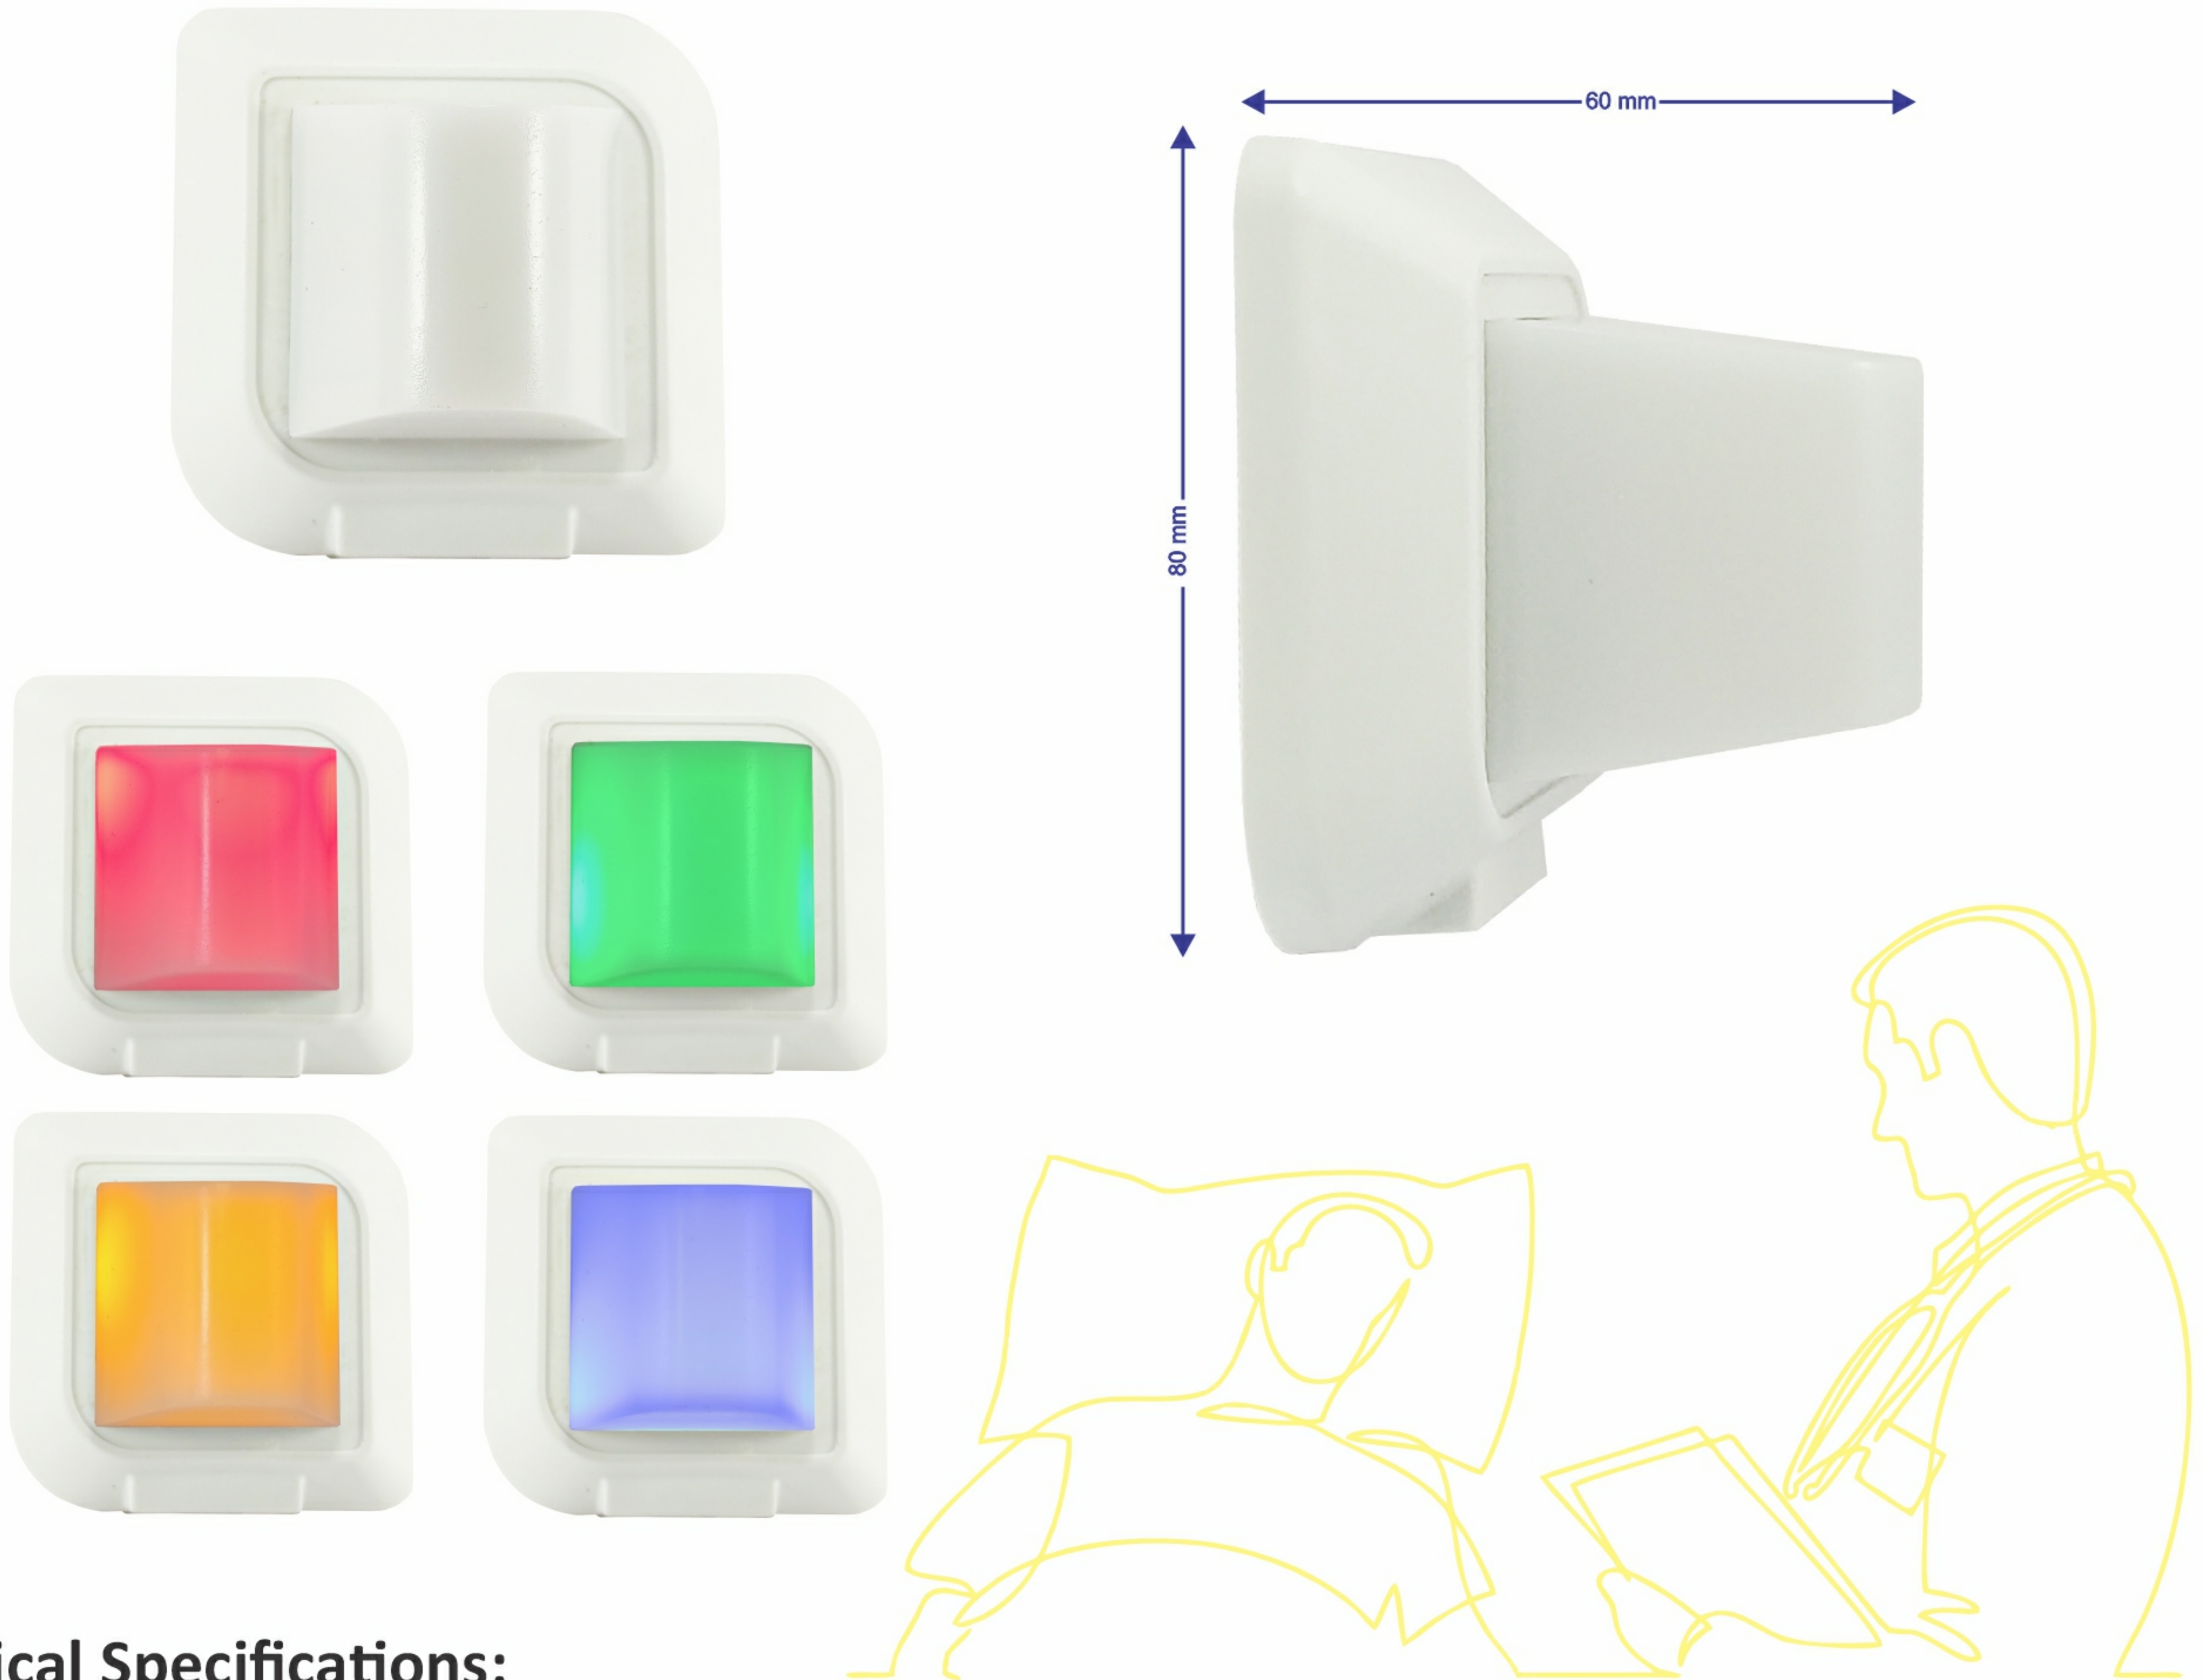
ODL-34 is a wedge-shape corridor light noticeable from 5 angles which is installed above the patients' room door in the corridor.

ODL-34 has 4 different LED Light colors that will illuminate showing the following states:

- Green Color (Steady): Normal Nurse Call status.
- Red Color (Blinking): Emergency/Critical Nurse Call Status.
- Yellow Color (Steady): Nurse Present status.
- Blue color (Blinking): Code Blue-CPR status.

The light is OFF when no Call has been activated.

It is also possible to set the colors for the 4 states customized through either flexible (changeable by the customer) 12-Bit switches (ODL-35) or fixed (one-time set by the technician) 12-Bit H.W integrated jumpers (ODL-36), each rendering 4'000 colors.


Technical Specifications:

Weight	75g		
Dimensions	W: 80 mm	H:80 mm	D: 60 mm
Raw Material	ABS		
Color	White		
Power Supply	5 V		
Light Type	LED		
LED Colors	Green /Red /Yellow /Blue		
Operating Temperature	-10°C ~ +50°C		
Operating Humidity	30-% ~ 80% RH		
Mounting	Flush/Surface		