


BASIC NCS-STAFF DISPLAY UNIT (CUN-02)

CUN-02 is the staff console for the BASIC NCS with the capability to show four initiated calls in a queue of 120 in 2 priority levels. The higher priority calls are displayed with a colored rectangle starting from top left and ending in bottom right in chronological order. It connects to the terminal box through the LAN network of the hospital via its RJ45 socket .It has an internal speaker to make acoustic notification alarm for an incoming call with custom melodies stored on its Micro-SD card. It is capable to store the log of the last 30 calls in its memory for reporting purposes incase the dedicated logging computer is off-grid for a limited time.

The content of CUN-02 is provided by the terminal box (TBN-02) via local network.

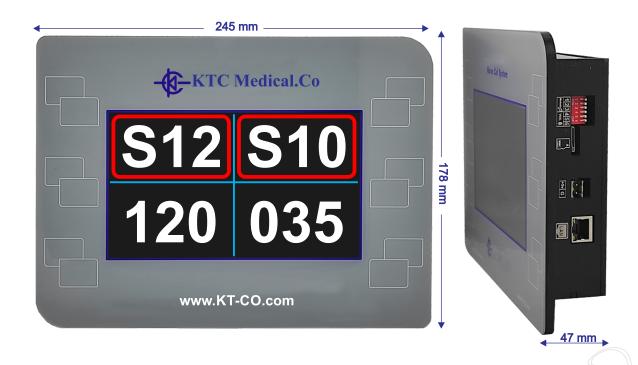

Technical Specifications:

Weight	918 g		
Dimensions	W: 245 mm	H: 178 mm	D: 47 mm
Raw Material	Plexiglass+ Plexprint		
Color	White		
Power Supply	5 V via external AC adapter		
Display Type	7-inch TFT		
Internal Speaker	2 W, 8 Ohms		
Port	RJ45 via Crossed Cable		
Operating Temperature	-10°C ∼ +50° C		
OperatingHumidity	30% ~ 80% RH		
Mounting	Surface		