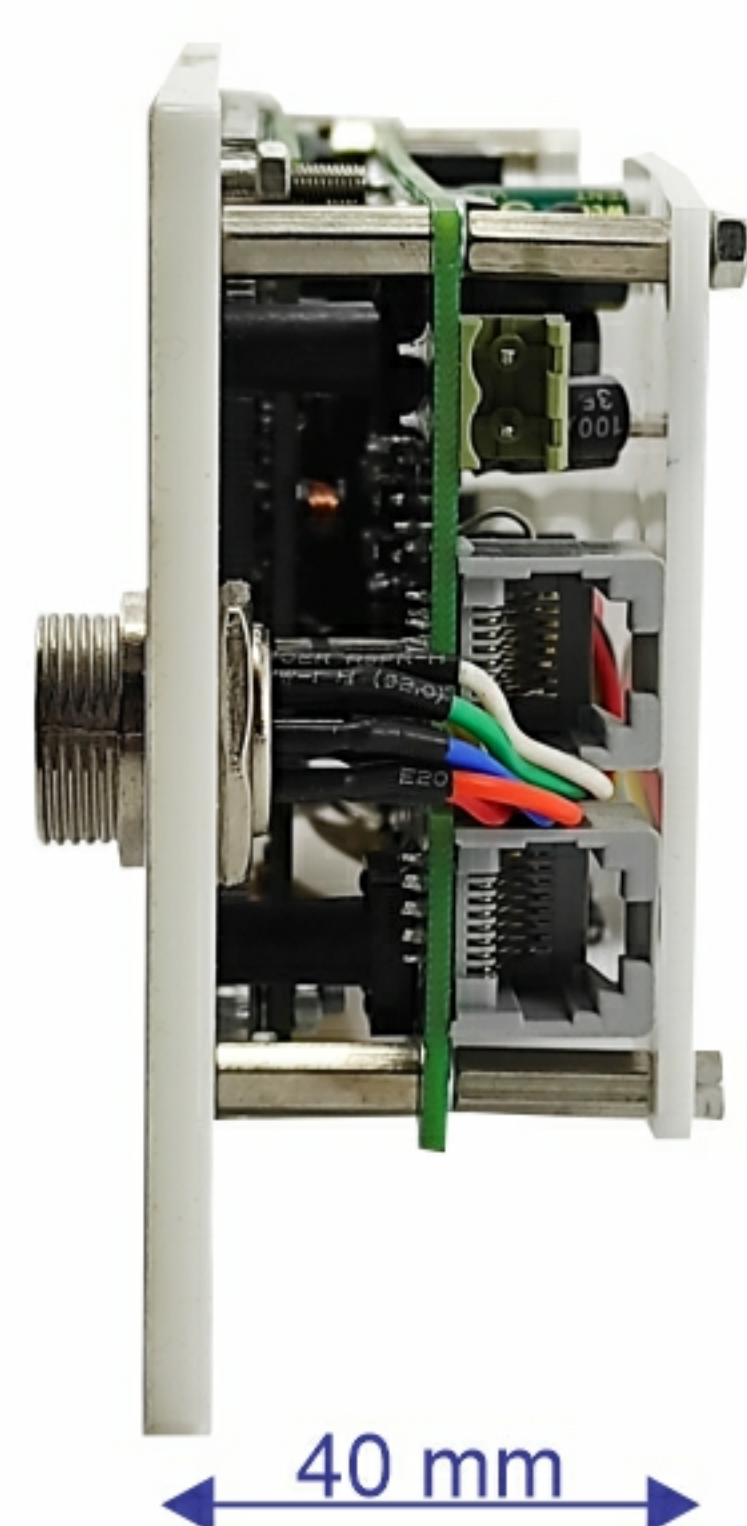
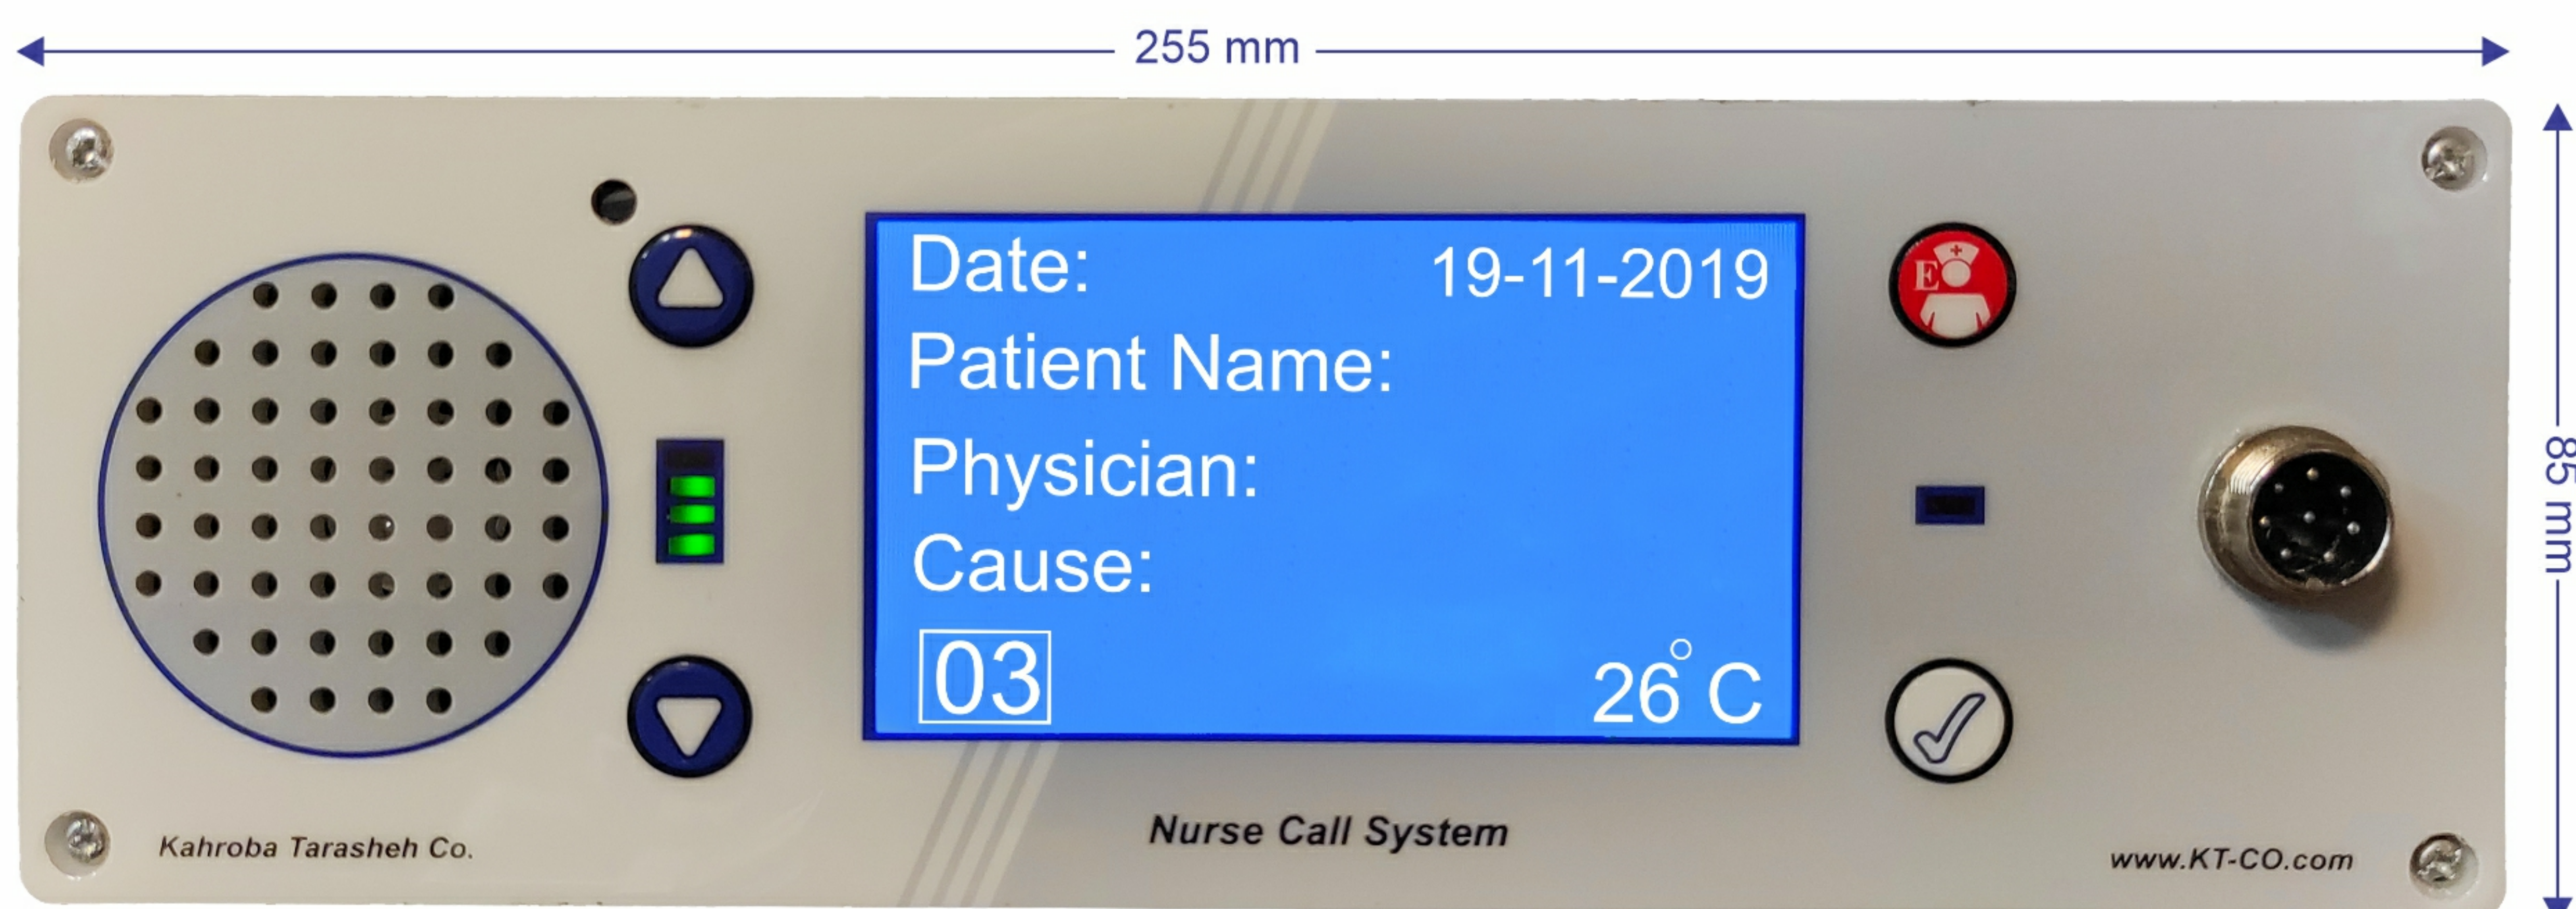


SMART NCS-PATIENT'S INTERCOM PANEL (BCU-34N)

BCU-34N is the bedside Patient's panel with a speaker to enable 2-way full-duplex communication between the patient and the management staff using the microphone on the pear push switch or handset (NCB-33/35). It has 2 buttons to adjust the volume of the speaker. It is equipped with an 8-pin military connector to ensure constant connectivity of the panel to Patient's Handset / Pear push Button (NCB-33/35) despite probable jolts.

BCU-34N also has a Nurse Call and a Cancel/Presence Switch and can initiate 5 different emergency code calls by holding any of the 2 volume rocker buttons and then pressing any of the other 3 remaining buttons (other volume rocker button or cancel button or emergency call button).

BCU-34N comes with a 4.3-inch display to monitor the Patient particulars from Hospital Information System (HIS) through Staff Console (CUI-32). The display shows date, room temperature, bed number, physician name and the cause for hospitalization.


Technical Specifications:

Weight	377 g
Dimensions	W:25 mm H: 85 mm D:40 mm
Raw Material	Polycarbonate, Plexiglass
Power Supply	12 V DC (via an external Power Adaptor)
Color	White
Port1	RJ45 Connector to Layout Ring Wiring
Port2	8-pin, Military male connector to Patient's Handset
LCD Type, Size	TFT, 4.3"
Speaker	8 ohms, 0.5 Watt
Operating Temperature	-10 ° C ~ +50° C
Operating Humidity	30% ~ 80% RH
Mounting	Flush (Cavity Dimension: 235 mm x 78 mm x 100 mm)