


WIRELESS NCS - PATIENT PANEL (WB-02/P)

WB-02 comes with an RJ9 socket for Pear push Switch (PBW-01). It has a Blue code, Normal Nurse Call and a Cancel/Presence Switch onboard.

It is powered by a 3 V coin Battery or an external 5 VDC power adapter version (WB-02P) to eliminate the battery life issue.

It can be installed easily next to patient's bed regardless of the wiring layout of the facility.

This module is equipped with low-level battery indicator feature to help the staff replace the battery when needed.

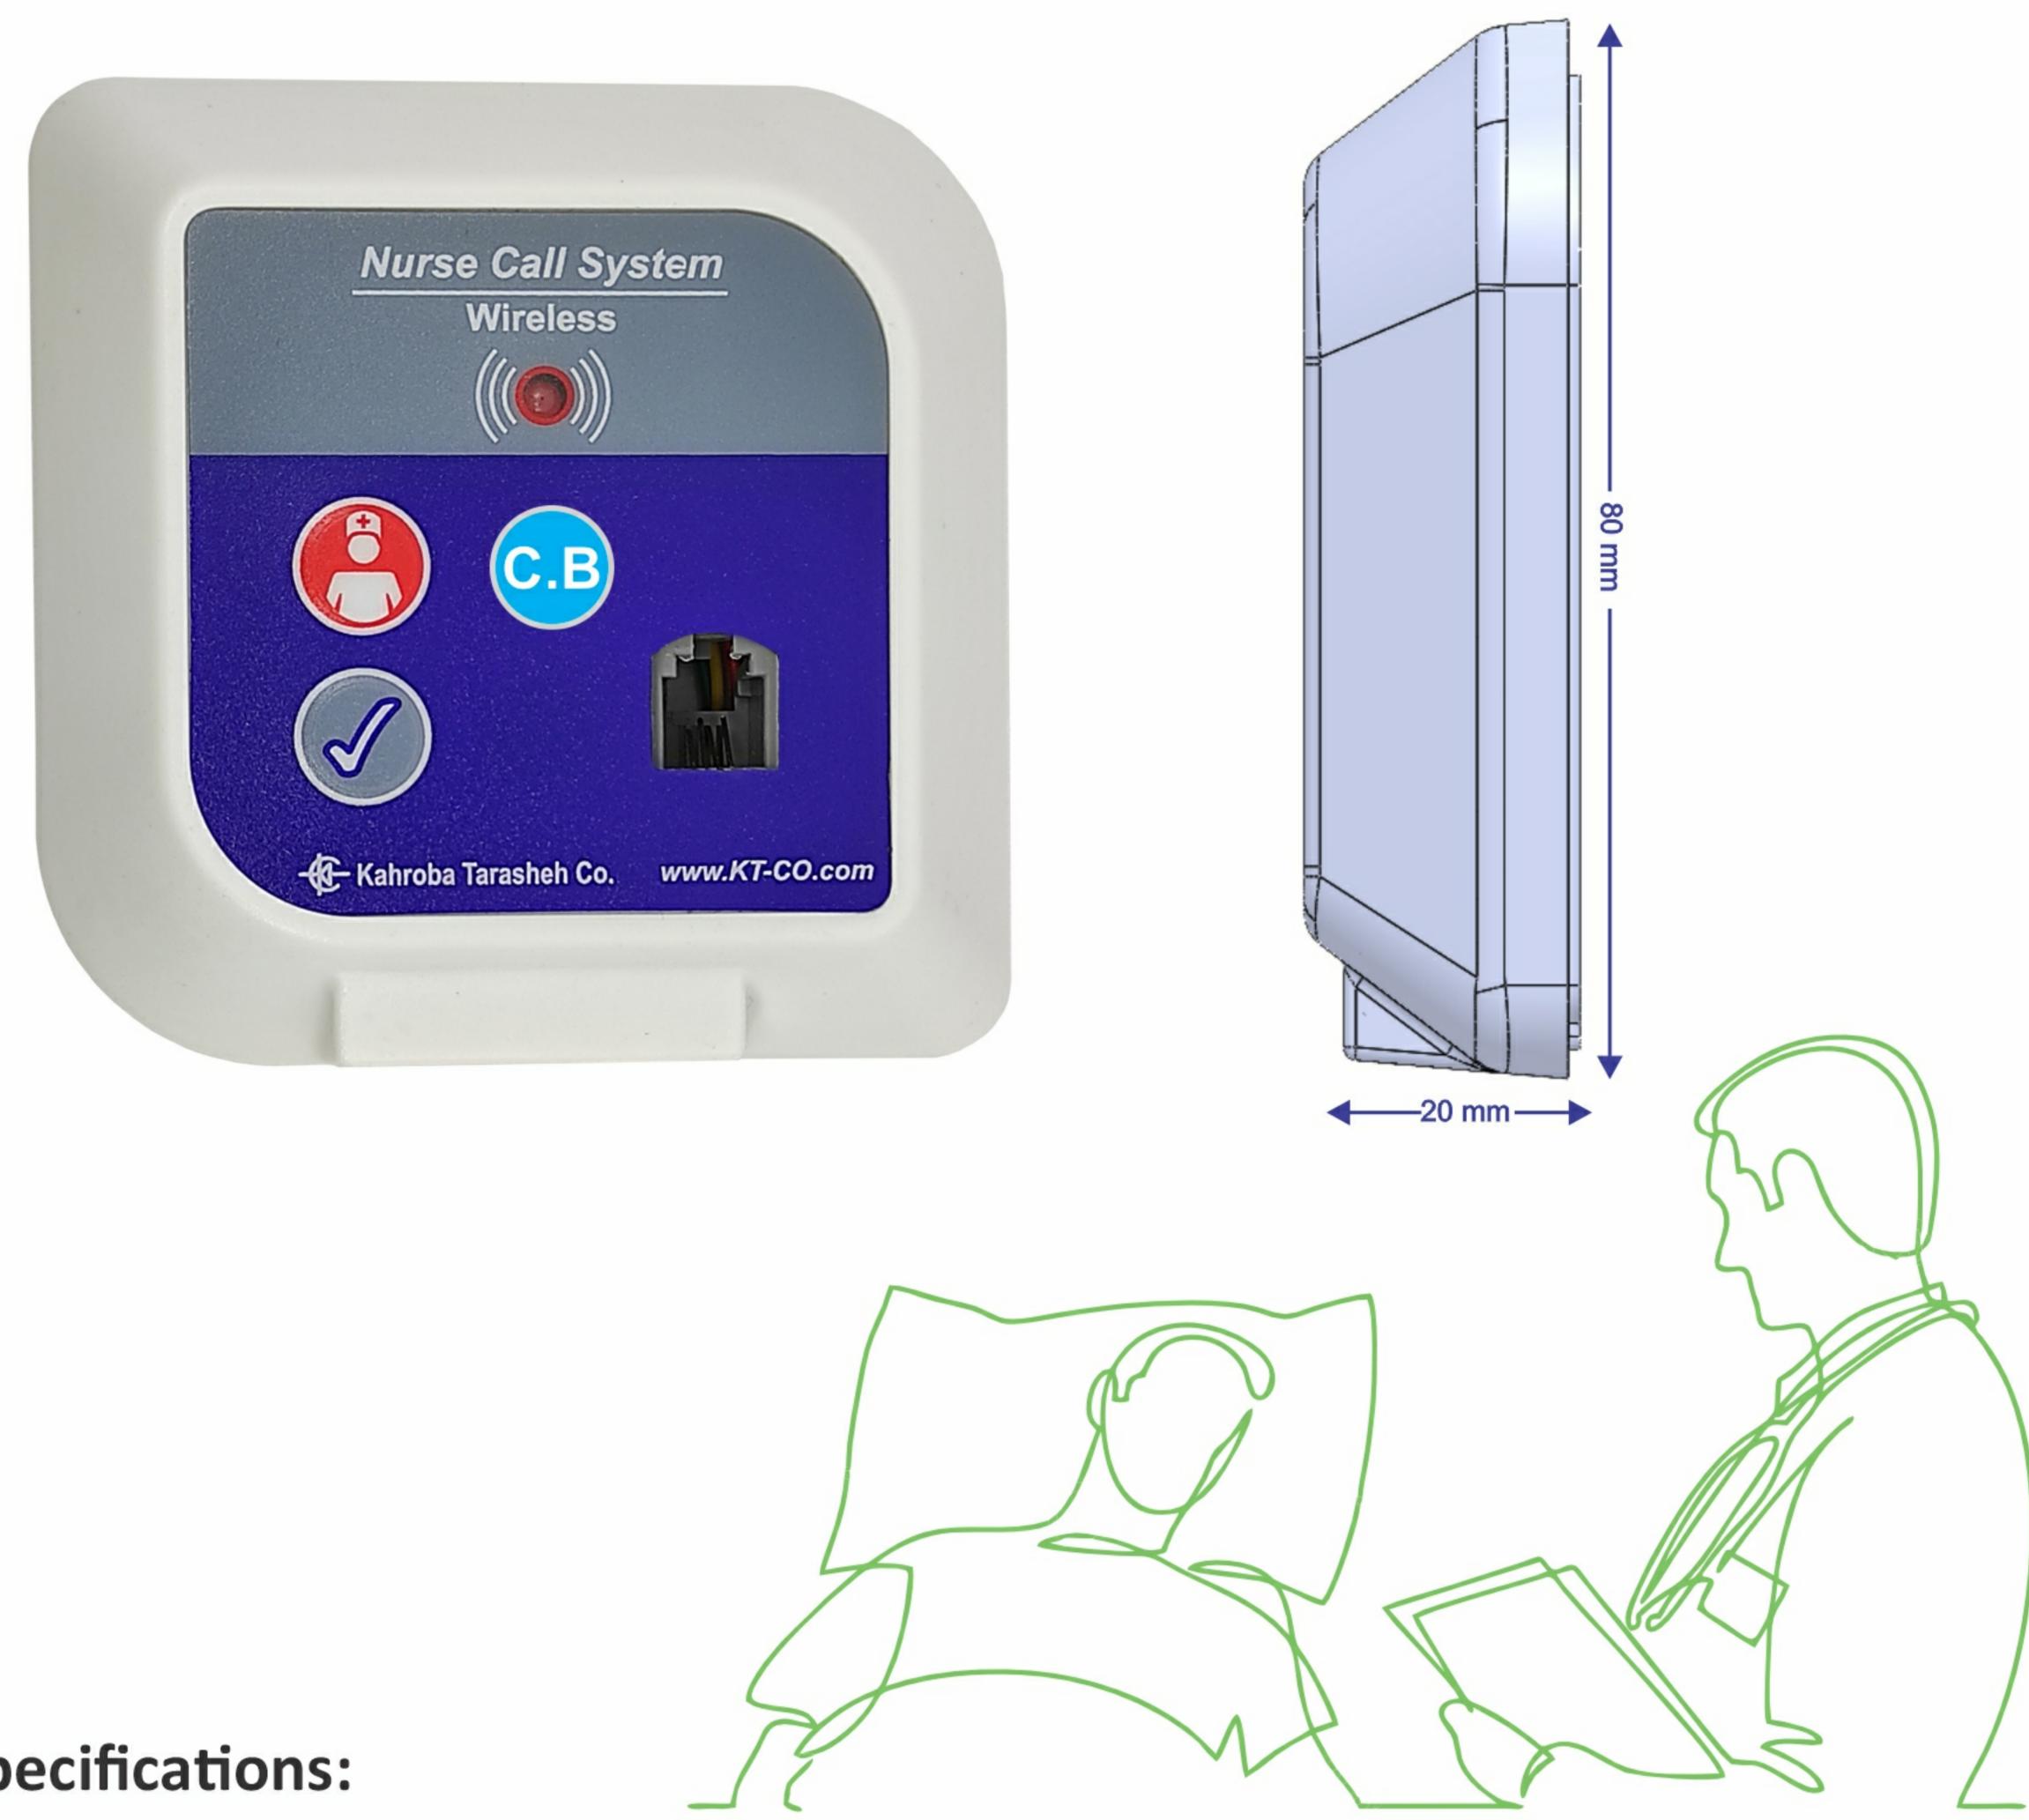

Technical Specifications:

| Weight | 60g | | |
|-----------------------|----------------------------|--------|---------|
| Dimensions | W:80mm | H:80mm | D:20 mm |
| Raw Material: | Polycarbonate + ABS | | |
| Color | White | | |
| Power Supply | 12 V Battery | | |
| Battery Type | 23A Alkaline | | |
| Battery Life | 6 Months | | |
| Wireless Range | 100 meters radius outdoors | | |
| Wireless Frequency | 433 MHz | | |
| Cord Capacity | Max20Kg | | |
| Operating Temperature | -10°C +50°C | | |
| Operating Humidity | 30-% 80% RH | | |
| Mounting | Surface/Flush | | |